

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 239 065 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
11.09.2002 Bulletin 2002/37

(51) Int Cl.7: **D01D 5/30**, D01D 5/32,  
D01D 5/34, D01D 5/098,  
D01D 4/02

(21) Application number: **02004806.2**

(22) Date of filing: **02.03.2002**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(71) Applicant: **NORDSON CORPORATION**  
Westlake, Ohio 44145-1119 (US)

(72) Inventor: **Allen, Martin A.**  
Dawsonville, Georgia 30534 (US)


(30) Priority: **09.03.2001 US 802646**

(74) Representative: **Eisenführ, Spelser & Partner**  
Martinistrasse 24  
28195 Bremen (DE)

**(54) Apparatus and method for extruding multi-component filaments**

(57) A melt spinning apparatus includes fiber producing features to produce multi-component filaments by extruding two or more single-component strands that combine after extrusion and are then attenuated by process air. The two or more liquid materials do not con-

tact one another in the spinpack. Separation of the two types of liquid material throughout the spinpack prevents premature leakage between two liquid materials and allows for an optimized temperature for each type of liquid material for proper extrusion.

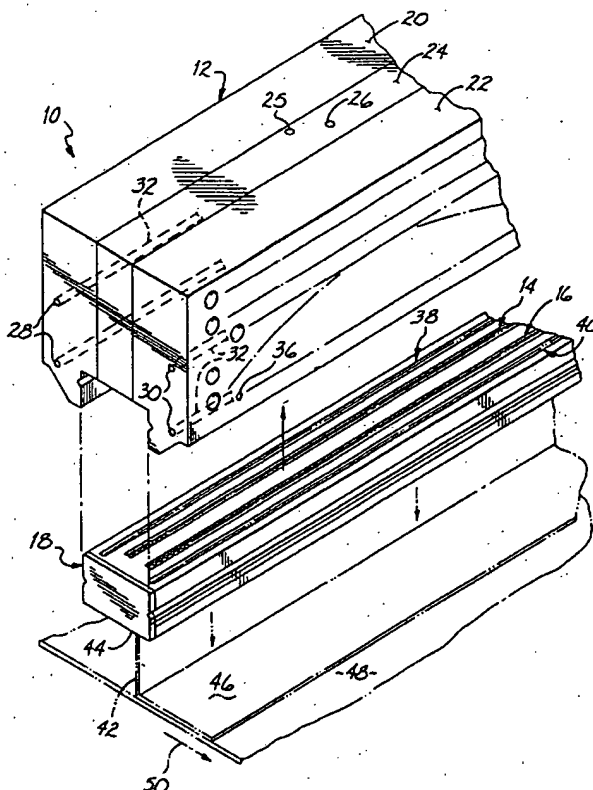

**FIG. 1**

**EP 1 239 065 A1**

## Description

### Cross-Reference to Related Applications

[0001] This application is related to the following co-  
pending and commonly-owned application which was  
filed on even date herewith, namely U.S. Serial No.  
09/802/651, entitled "APPARATUS FOR PRODUCING  
MULTI-COMPONENT LIQUID FILAMENTS" (Attorney  
Docket No. NOR-983) and the disclosure of which is  
hereby incorporated by reference herein in its entirety.

### Field of the Invention

[0002] The present invention generally relates to ex-  
truding two separate liquid materials into filaments or  
strands and, more particularly, to a melt spinning appa-  
ratus for spunbonding or meltblowing two separate liq-  
uid materials into multi-component filaments.

### Background of the Invention

[0003] Melt spun fabrics manufactured from synthetic  
thermoplastics have long been used in a variety of ap-  
plications including filtration, batting, fabrics for oil  
cleanup, absorbents such as those used in diapers and  
feminine hygiene products, thermal insulation, and ap-  
parel and drapery for medical uses.

[0004] Melt spun materials fall in the general class of  
textiles referred to as nonwovens since they comprise  
randomly oriented filaments, or fibers, made by entan-  
gling the fibers through mechanical means. The fiber en-  
tanglement, with or without some interfiber fusion, im-  
parts integrity and strength to the fabric. The nonwoven  
fabric may be converted to a variety of end use products  
as mentioned above.

[0005] Although melt spun nonwovens may be made  
by a number of processes, the most popular processes  
are meltblowing and spunbond processes, both of which  
involve melt spinning of thermoplastic material. Melt-  
blowing is a process for the manufacture of a nonwoven  
fabric wherein a molten thermoplastic is extruded from  
a die tip to form a row of filaments. The fibers exiting the  
die tip are immediately contacted with converging  
sheets or jets of hot air to stretch or draw the filaments  
down to microsize diameter. The fibers are then depos-  
ited onto a collector in a random manner and form a non-  
woven fabric.

[0006] The spunbond process involves the extrusion  
of continuous filaments through a spinneret. The extrud-  
ed filaments are maintained apart and the desired ori-  
entation of the filaments is achieved, for example, by  
electrical charges, by controlled air streams, or by the  
speed of the collector. The filaments are collected on  
the collector and bonded by passing the layer of fila-  
ments through compacting roll and/or hot roll calendar-  
ing.

[0007] Nonwoven materials are used in such products

as diapers, surgical gowns, carpet backings, filters and  
many other consumer and industrial products. The most  
popular machines for manufacturing nonwoven materi-  
als use meltblown and spunbond apparatus. For certain  
applications, it is desirable to utilize multiple types of  
thermoplastic liquid materials to form individual cross-  
sectional portions of each filament. Often, these multi-  
component filaments comprise two components and,  
therefore, are more specifically referred to as bicompo-  
nent filaments. For example, when manufacturing non-  
woven materials for use in the garment industry, it may  
be desirable to produce bicomponent filaments having  
a side-by-side construction. One important considera-  
tion involves the cost of the material. For example, one  
strand of inexpensive material may be combined with a  
strand of more expensive material. The first strand may  
be formed from polypropylene or nylon and the other  
strand may be formed from a polyester or co-polyester.  
In addition, the two types of material may contract a dif-  
ferent amount when drying or cooling, creating a curly  
filament with desirable properties.

[0008] Many other multi-component fiber configura-  
tions exist, including sheath-core, tipped, and microde-  
nier configurations, each having its own special appli-  
cations. Various material properties can be controlled  
using one or more of the component liquids. These in-  
clude, as examples, thermal, chemical, electrical, opti-  
cal, fragrance, and anti-microbial properties. Likewise,  
many types of die tips exist for combining the multiple  
liquid components just prior to discharge to produce fil-  
aments of the desired cross-sectional configuration.

[0009] Various apparatus form bi-component fila-  
ments with a die tip comprising vertically or horizontally  
stacked plates. In particular, a melt blowing die tip di-  
rects two flows of liquid material to opposing sides near  
the top of a stack of the vertical plates. A spunbond die  
tip directs two different material flows to the top plate of  
a stack of horizontal plates. Liquid passages etched or  
drilled into the vertical or horizontal stack of plates direct  
the two different types of liquid material to a location at  
which they are combined within the die tip and then ex-  
truded at the discharge outlets as multi-component fila-  
ments. Various cross-sectional configurations of fila-  
ments are achieved, such as side-by-side and sheath-  
core configurations.

[0010] Using a stack of thin plates in either a vertical  
or horizontal orientation manner suffers from imperfect  
seals between plates. In a production environment, liq-  
uid pressure will cause adjacent plates to move slightly  
away from each other. Thus, small amounts of liquid of  
one type can leak through these imperfect seals, caus-  
ing "shot" or small balls of polymer to be formed in the  
extruded filaments. The shot causes the multi-compo-  
nent filaments to form with problems such as reduced  
strength or increased roughness. Also, the stacked  
plates may not offer a substantial thermal barrier be-  
tween the two types of liquid material. Consequently, the  
filaments of each liquid material may not combine at

their respective optimum temperatures, possibly adversely affecting extrusion thereof.

[0011] Other apparatus avoid the use of stacked plates by having the two types of liquid material combine in a cavity prior to extrusion of the through multiple discharge passages. More specifically, two different types of liquid materials, such as thermoplastic polymers, initially reside side-by-side in the cavity and are delivered under pressure to the discharge passages where they are extruded in side-by-side relation as bicomponent filaments. Since the two liquid materials reside in side-by-side relation in the die cavity and discharge passages, this may lead to thermal problems or problems related to the materials improperly combining or mixing prior to extrusion.

[0012] For these reasons, it is desirable to provide apparatus and methods for melt spinning multi-component filaments without encountering various problems of prior melt spinning apparatus.

### Summary of the Invention

[0013] The present invention provides methods and apparatus for melt spinning multiple types of liquid materials into multi-component filaments. This includes, for example, melt spinning apparatus and methods related to meltblown and spunbond applications. In particular, a spinpack or die tip of a melt spinning apparatus produces multi-component filaments by extruding two single-component filaments from a die tip that combine after extrusion to thereby form multi-component filaments. The two liquid materials do not contact one another until after each is extruded through a separate orifice in the die tip. Maintaining the separation of the two types of liquid material throughout the spinpack prevents premature leakage between two liquid flows and allows for maintaining an optimized temperature for each type of liquid material for proper extrusion.

[0014] The method of this invention produces multi-component filaments by extruding a first strand of a first type of liquid material and simultaneously extruding a second strand of a second type of liquid material. The two strands combine together after the extrusion of each and thereby form a multi-component filament, for example, having essentially a side-by-side cross-sectional configuration of the two component materials.

[0015] The melt spinning apparatus of this invention comprises a die tip having a first liquid input configured to communicate with a supply of the first type of liquid material and having a second liquid input configured to communicate with a supply of the second type of liquid material. The die tip further includes first outlets or orifices for extruding first strands of the first type of liquid material and second outlets or orifices for extruding second strands of the second type of liquid material. Each first outlet is adjacent to a corresponding one of the second outlets for extruding respectively the first and second strands that combine together after extrusion into a

multi-component filament.

[0016] Various advantages, objectives, and features of the invention will become more readily apparent to those of ordinary skill in the art upon review of the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings.

### Brief Description of the Drawings

[0017]

Fig. 1 is an exploded perspective view of a multi-component melt spinning apparatus constructed in accordance with the invention.

Fig. 2 is an exploded perspective view of one end of a spinpack of the melt spinning apparatus of Fig. 1 constructed in accordance with the invention for producing a multi-component filament.

Fig. 3 is a cross-section taken generally along line 3-3 of Fig. 2, but illustrating the spinpack in assembled condition.

Fig. 4 is an enlarged cross-section of the discharge region of the die tip of the spinpack of Fig. 3.

Fig. 5 is a partial bottom view of the assembled spinpack of Fig. 3.

Fig. 6 is a diagrammatic view of a meltblown apparatus incorporating a meltspinning assembly of the present invention.

Fig. 7 is a diagrammatic view of a spunbond apparatus incorporating a meltspinning assembly of the present invention.

### Detailed Description of the Preferred Embodiments

[0018] For purposes of this description, words such as "vertical", "horizontal", "bottom", "right", "left" and the like are applied in conjunction with the drawings for purposes of clarity. As is well known, melt spinning devices may be oriented in substantially any orientation, so these directional words should not be used to imply any particular absolute directions for a melt spinning apparatus consistent with the invention. In addition, the terms "different", "two types", and similar terminology with regard to the liquids employable with this invention are not meant to be restrictive, except to the extent that the two liquids have one or more different properties. The liquids may be the same polymer, for example, but have different physical properties due to different treatments.

[0019] Post-extrusion combining of two single-component strands into a multi-component filament avoids physical interaction or contact between the different types of liquid materials before extrusion. The strands are urged together by the direction of their extrusion. In the case of a meltblown application of this invention, the impingement of process air may also assist in urging the two strands of the different materials into a multi-component filament. The complete physical separation prior

to extrusion prevents any leakage between the flow of different liquid materials that cause defects such as "shot" to form in one of the constituent liquid materials. Moreover, the flows are physically separated in the spinpack to provide thermal isolation between types of liquids that are to be extruded at different temperatures.

**[0020]** With reference to Fig. 1, a melt spinning assembly 10 constructed in accordance with the inventive principles includes a manifold assembly 12 for supplying two types of liquid material (polymer A and polymer B) respectively to liquid inputs 14, 16 of a spinpack 18. The inputs 14 and 16 are sealed to the manifold assembly 12 such as by static seals retained within recesses (not shown) around each input 14, 16.

**[0021]** The manifold assembly 12 includes first and second outer manifold elements 20, 22. An intermediate manifold element 24 is coupled between outer manifold elements 20, 22 in sandwiching relation. An upper surface of intermediate manifold element 24 includes first and second liquid supply inlets 25, 26 that receive polymers A and B respectively from liquid supplies, such as liquid pumps (not shown). Each supply inlet 25 communicates with a recess (not shown) formed between outer manifold element 20 and intermediate manifold element 24. The recess forms a "coat hanger" shape to form a first manifold liquid passage to provide liquid to at least a portion of the longitudinal length of liquid input 14 of the spinpack 18. Similarly, supply inlet 26 communicates with a recess (not shown) formed between outer manifold element 22 and intermediate manifold element 24. The recess forms another "coat hanger" shape to form a second manifold liquid passage to provide liquid to at least a portion of the longitudinal length of liquid input 16 of the spinpack 18. The manifold assembly 12 may include a plurality of supply inlets 25, 26 and corresponding first and second manifold liquid passages along its longitudinal length depending on the length of the spinpack 18.

**[0022]** Holes 28 and 30 located along the length of each outer manifold element 20, 22 each receive a heating device, such as an electrical heater rod 32 for independently heating the two liquids in their respective first and second manifold liquid passages and the process air to an appropriate application temperature. Temperature sensing devices (not shown), such as resistance temperature detectors (RTDs) or thermocouples are also placed in outer manifold elements 20, 22 to independently control the temperature of each type of liquid material.

**[0023]** It should be appreciated by those skilled in the art having the benefit of the present disclosure that various heating systems consistent with aspects of the invention may be appropriately used in different applications.

**[0024]** Outer manifold elements 20, 22 further include a plurality of air supply passages 34, 36 for supplying pressurized air (process air) to air passage inputs 38, 40 of the spinpack 18. The process air attenuates multi-

component filaments 42 extruded along the longitudinal length of the spinpack 18 from a row of multi-component filament discharge outlets 44 (see depictions in Figs. 3-5). The attenuated multi-component filaments 42 form a nonwoven fabric 46 upon a substrate 48 that generally is moving transverse to the melt spinning apparatus 10, such as shown by arrow 50.

**[0025]** With reference to Fig. 2, the spinpack 18 includes the filament producing features of the melt spinning apparatus 10. In particular, a transfer block 52 includes longitudinal side recesses 54, 56 for mounting the spinpack 18 to the manifold assembly 12. The transfer block 52 further includes the liquid inputs 14, 16 and air passage inputs 38, 40.

**[0026]** A die tip block 58, attached below the transfer block 52 to form a die tip, includes first and second rows of air passages 60, 62 and first and second rows of liquid passages 64, 66. A pair of air knife plates 68, 70 are attached below the die tip block 58.

**[0027]** With reference to Figs. 3-5, the spinpack 18 is depicted in assembled condition showing how the process air and the two types of liquid material are brought together at each multi-component filament discharge outlet 44. The two types of liquid material (polymers A and B) are kept separate from one another in respective liquid passages 72, 74 throughout the entire spinpack 18 and are extruded separately. In particular, polymer A is extruded at a plurality of first outlets 76 and polymer B is extruded at a plurality of second outlets 78, each second outlet 78 adjacent to a corresponding one of the first outlets 76. Therefore, premature leakage of one liquid material into the other are avoided. In addition, each type of liquid material is advantageously maintained at a respective temperature for proper extrusion and post-extrusion combining of the two different liquid strands.

**[0028]** In particular, a supply of the first type of liquid material from the manifold assembly 12 enters the first liquid input 14 in the transfer block 52 of the spinpack 18 to form a first flow, such as at arrow 80. The first flow 80 encounters a first filter 82 disposed within a first filter recess 84 for entrapping contaminants. The first flow 80 continues through a first liquid transfer passage 86, which may be a single longitudinal slot or a series of passages each longitudinally aligned with one of the first outlets 76.

**[0029]** The die tip block 58 has a longitudinally aligned row of first die tip liquid passages 88 communicating between the first liquid transfer passage 86 in the transfer block 52 and with a respective one of the first outlets 76 in the die tip block 58.

**[0030]** Similarly, a supply of the second type of liquid material from the manifold assembly 12 enters the second liquid input 16 in the transfer block 52 of the spinpack 18 to form a second flow, such as at arrow 90. The second flow 90 encounters a second filter 92 disposed within a second filter recess 94 for entrapping contaminants. The second flow 90 continues through a second liquid transfer passage 96, which may be a single lon-

gitudinal slot or a series of passages each longitudinally aligned with one of the second outlets 78.

[0031] The die tip block 58 has a longitudinally aligned row of second die tip liquid passages 98 communicating between the second liquid transfer passage 96 in the transfer block 52 and with a respective one of the second outlets 78 in the die tip block 58.

[0032] The transfer block 52 includes a first air transfer passage 99 that communicates with the first air passage input 38 and a second air transfer passage 100 that communicates with the second air passage input 40.

[0033] The die tip block 58 includes a first die tip air passage 102 that communicates between the first air transfer passage 99 and a converging air channel 104 formed between the air knife plate 68 and the die tip block 58. Similarly, the die tip block 58 includes a second die tip air passage 106 that communicates between the second air transfer passage 100 and a converging air channel 108 formed between the air knife plate 70 and the die tip block 58.

[0034] With particular reference to Fig. 4, the first flow 80 is extruded from one of the first outlets 76 as a single-component strand 110 and the second flow 90 is extruded from one of the second outlets 78 as a single-component strand 112. The first and second strands 110, 112 thereafter combine together into a multi-component filament 42 having a side-by-side cross-sectional configuration of the two liquid components. Bonding or combining is promoted by the proximity of the first and second outlets 76, 78 and the converging orientation of the first and second die tip liquid passages 88, 98.

[0035] With particular reference to Fig. 5, each pair of adjacently positioned first and second outlets 76, 78 are shown to tangentially meet. Consequently, the strands 110, 112 do not contact one another or bond until after extrusion. Each outlet 76, 78 is oblong due to the non-perpendicular orientation of the corresponding die tip liquid passages 88, 98 with respect to a bottom, external surface of the die tip 58.

[0036] A first air jet 114 exits air channels 104 at a first spin slot 116 and is directed at the multi-component filament 42. A converging, second air jet 118 exits air channel 108 at a second slot 120 and is directed at the multi-component filament 42. The air jets 114, 118 cooperate to impinge and attenuate the filament 42.

[0037] Fig. 6 illustrates a meltblown apparatus 200 using a spinpack 18 constructed in accordance with this invention. The apparatus 200 may be any suitable conventional meltblown apparatus or, for example, the apparatus disclosed in U.S. Patent No. 6,182,732, assigned to the assignee of the present invention and the disclosure of which is hereby fully incorporated by reference herein. The apparatus 200 generally includes an extruder 202 with a polymer feedline 204 for feeding the first type of material to the meltspinning assembly 10. The second type of liquid material is also fed from a similar extruder and polymer feedline (not shown). The ap-

paratus 200 is suitably supported above a substrate 206 or carrier for receiving the extruded multi-component filaments 42. The various other details of the apparatus are not described herein as these details will be readily understood by those of ordinary skill in the art.

[0038] Fig. 7 illustrates a spunbond apparatus 210 using a melt spinning assembly 10' constructed in accordance with the invention, except that in the case of a spunbond operation, the spinpack 18' need not include components and air passages for delivering process air adjacent to the extruded multi-component filaments 42. Again, the spunbond apparatus 210 shown in Fig. 7 may be constructed in an otherwise conventional manner, such as disclosed in the above incorporated U.S. Patent No. 6,182,732. This apparatus further includes air quenched ducts 212, 214 for purposes that will be readily understood by those of ordinary skill in the art. It will be understood that spinpack 18' may also be modified by those of ordinary skill to include multiple rows of multi-component filament discharge outlets.

[0039] While the present invention has been illustrated by a description of various preferred embodiments and while these embodiments has been described in some detail, it is not the intention of the Applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. The various features of the invention may be used alone or in numerous combinations depending on the needs and preferences of the user. This has been a description of the present invention, along with the preferred methods of practicing the present invention as currently known. However, the invention itself should only be defined by the appended claims, wherein what is claimed is:

#### Claims

1. An apparatus for extruding a first type of liquid material into a first plurality of strands and a second type of liquid material into a second plurality of strands and combining the first and second pluralities of strands into a plurality of multi-component filaments, comprising:

a die tip including a first liquid input configured to communicate with a supply of the first type of liquid material and a second liquid input configured to communicate with a supply of the second type of liquid material;  
a plurality of first liquid outlets each for extruding a corresponding plurality of first strands;  
a plurality of second liquid outlets each for extruding a corresponding plurality of second strands, each second outlet positioned adjacent to a corresponding one of said first liquid outlets;

a plurality of first liquid passages, each communicating between said first liquid input and a selected one of said first liquid outlets; and a plurality of second liquid passages, each communicating between said second liquid input and a selected one of said second liquid outlets, said first and second liquid passages respectively converging at said first and second liquid outlets for respectively extruding the pluralities of first and second strands, the first and second strands combining together immediately after extrusion to form the plurality of multi-component filaments having a cross-sectional configuration combining the first and second types of liquid material.

2. The apparatus of claim 1, further comprising:

a manifold assembly including a first manifold liquid passage communicating between the supply of the first type of liquid material and said first liquid input of said die tip and including a second manifold liquid passage communicating between the supply of the second type of liquid material and said second liquid input of said die tip, said manifold assembly further including a first heating device positioned proximate to said first manifold liquid passage for maintaining the supply of the first liquid material at a first predetermined temperature and including a second heating device positioned proximately to said second manifold liquid passage for maintaining the supply of the second liquid material at a second predetermined temperature.

3. The apparatus of claim 1, wherein said first and second outlets respectively tangentially meet at an external surface of said die tip.

4. The apparatus of claim 1, wherein the die tip further comprises:

a transfer block including said first and second liquid inputs and portions of said first and second liquid passages; and  
a die tip block including said first and second outlets and other portions of said first and second liquid passages.

5. An apparatus for extruding a first type of liquid material into a first plurality of strands and a second type of liquid material into a second plurality of strands and combining the first and second pluralities of strands into a plurality of multi-component filaments, comprising:

a die tip including a first liquid input configured

to communicate with a supply of the first type of liquid material and a second liquid input configured to communicate with a supply of the second type of liquid material;

a plurality of first liquid outlets each for extruding a corresponding plurality of first strands;

a plurality of second liquid outlets each for extruding a corresponding plurality of second strands, each second outlet positioned adjacent to a corresponding one of said first liquid outlets;

a plurality of first liquid passages, each communicating between said first liquid input and a selected one of said first liquid outlets;

a plurality of second liquid passages, each communicating between said second liquid input and a selected one of said second liquid outlets, said first and second liquid passages respectively converging at said first and second liquid outlets for respectively extruding the pluralities of first and second strands, the first and second strands combining together immediately after extrusion to form the plurality of multi-component filaments having a cross-sectional configuration combining the first and second types of liquid material; and

air passages positioned on opposite sides of said first and second liquid outlets and configured to direct process air to impinge the multi-component filaments.

6. A method of producing multi-component filaments, comprising:

extruding a plurality of first strands of a first type of liquid material;

simultaneously extruding a plurality of second strands of a second type of liquid material; and  
combining the plurality of first strands respectively with the plurality of second strands into multi-component filaments immediately after extrusion, each filament having a cross-sectional configuration combining the first and second types of liquid material.

7. The method of claim 6, further comprising:

impinging pressurized air upon the coalescing multi-component filaments for attenuating the multi-component filaments.

8. The method of claim 6, further comprising:

maintaining a supply of the first type of liquid material at a first predetermined temperature prior to extrusion as the plurality of first strands.

9. The method of claim 8, further comprising:

maintaining a supply of the second type of liquid material at a second predetermined temperature prior to extrusion as the plurality of second strands.

5

10

15

20

25

30

35

40

45

50

55

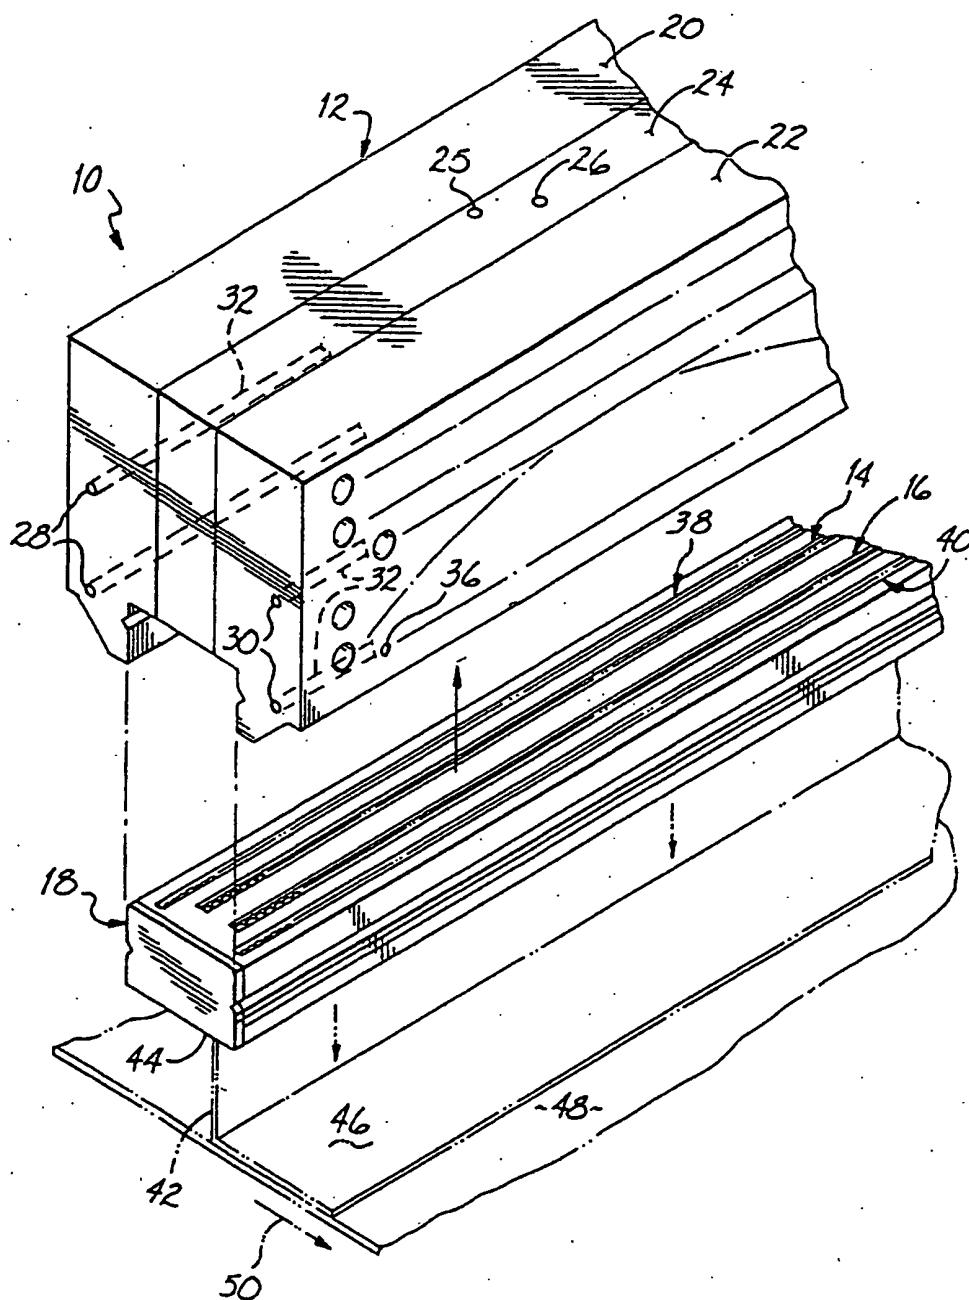


FIG. 1



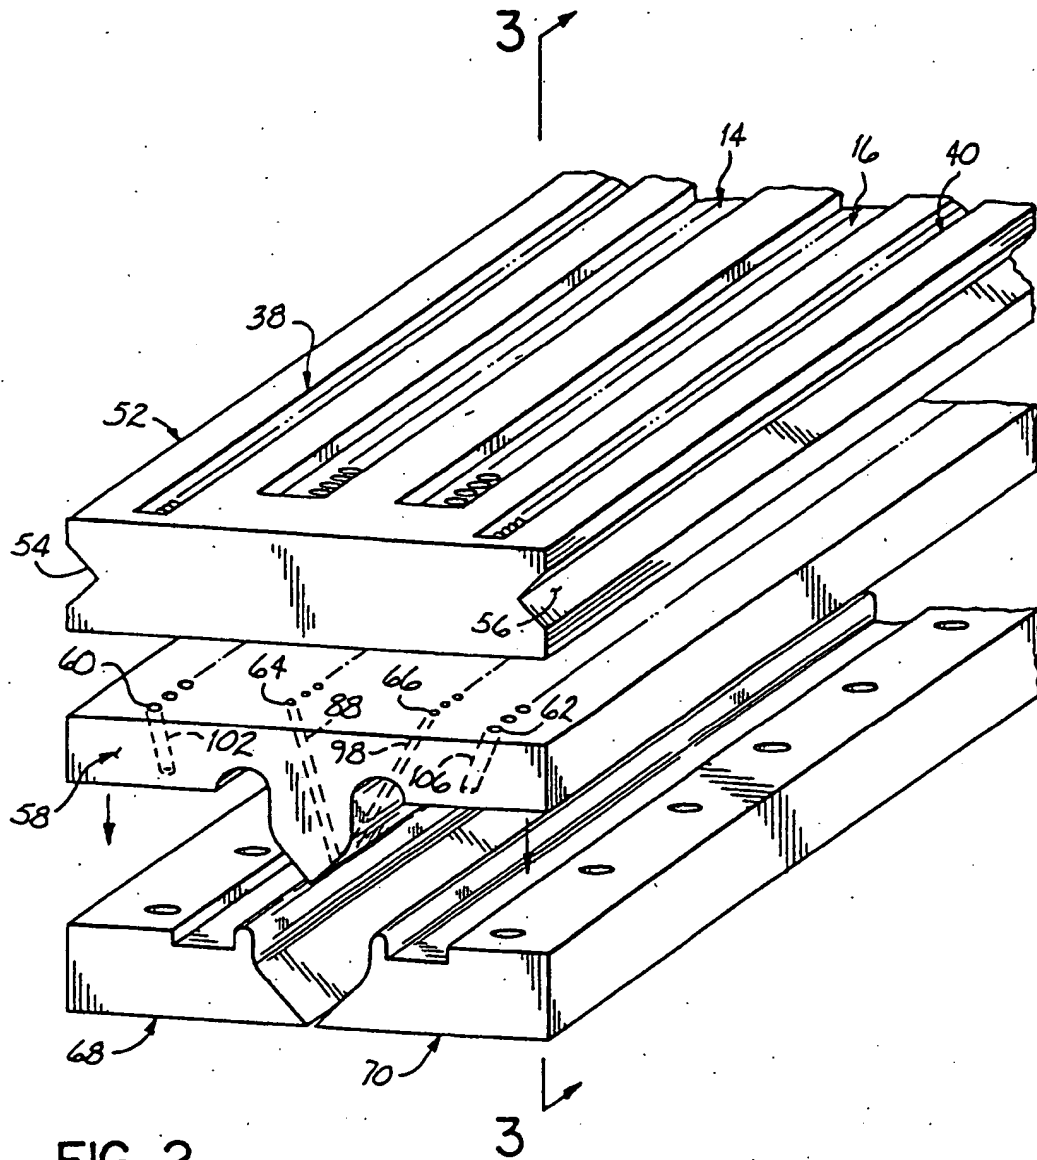


FIG. 2

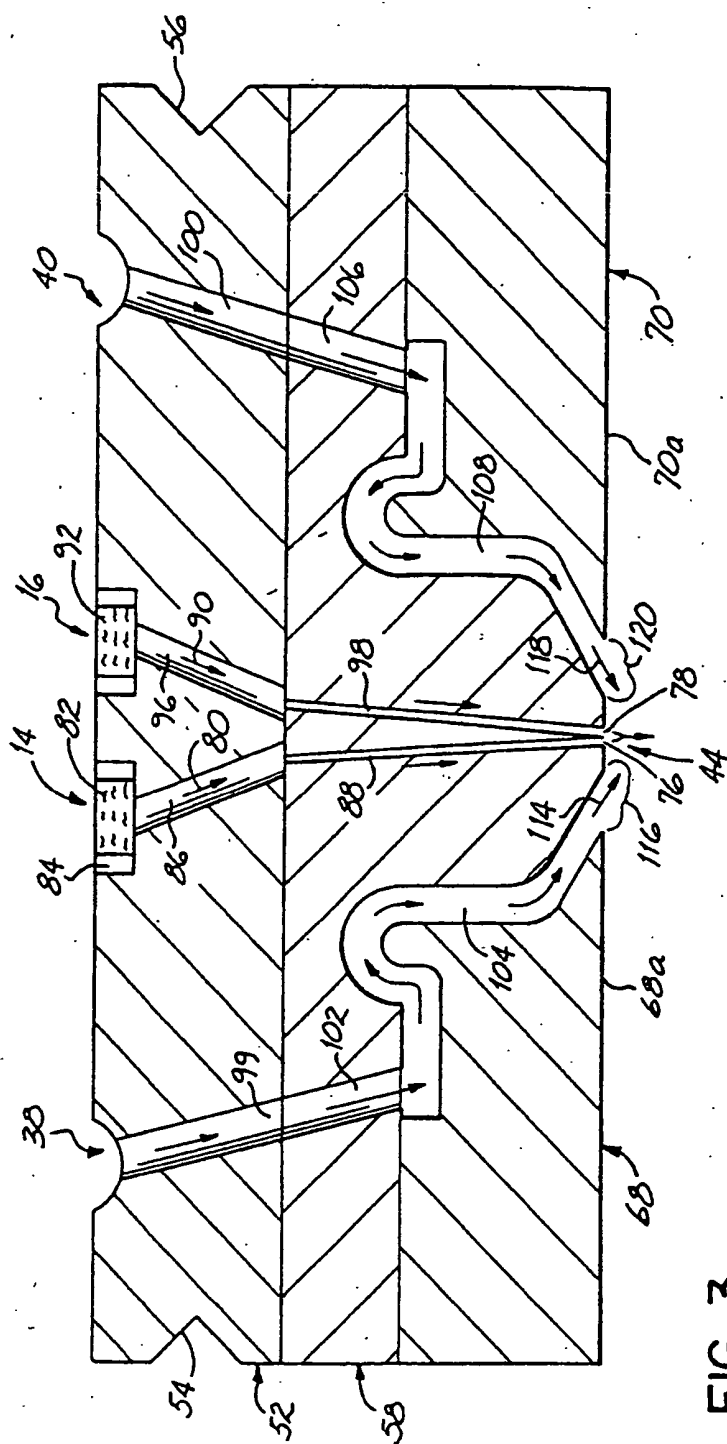


FIG. 3

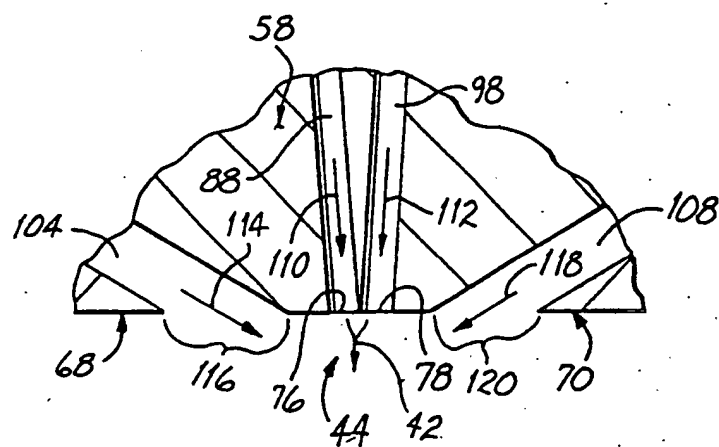


FIG. 4

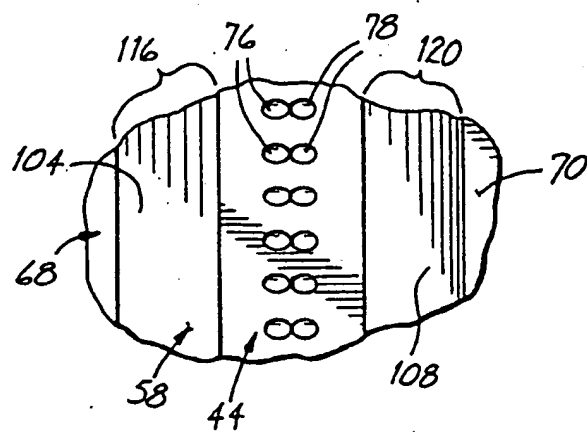


FIG. 5

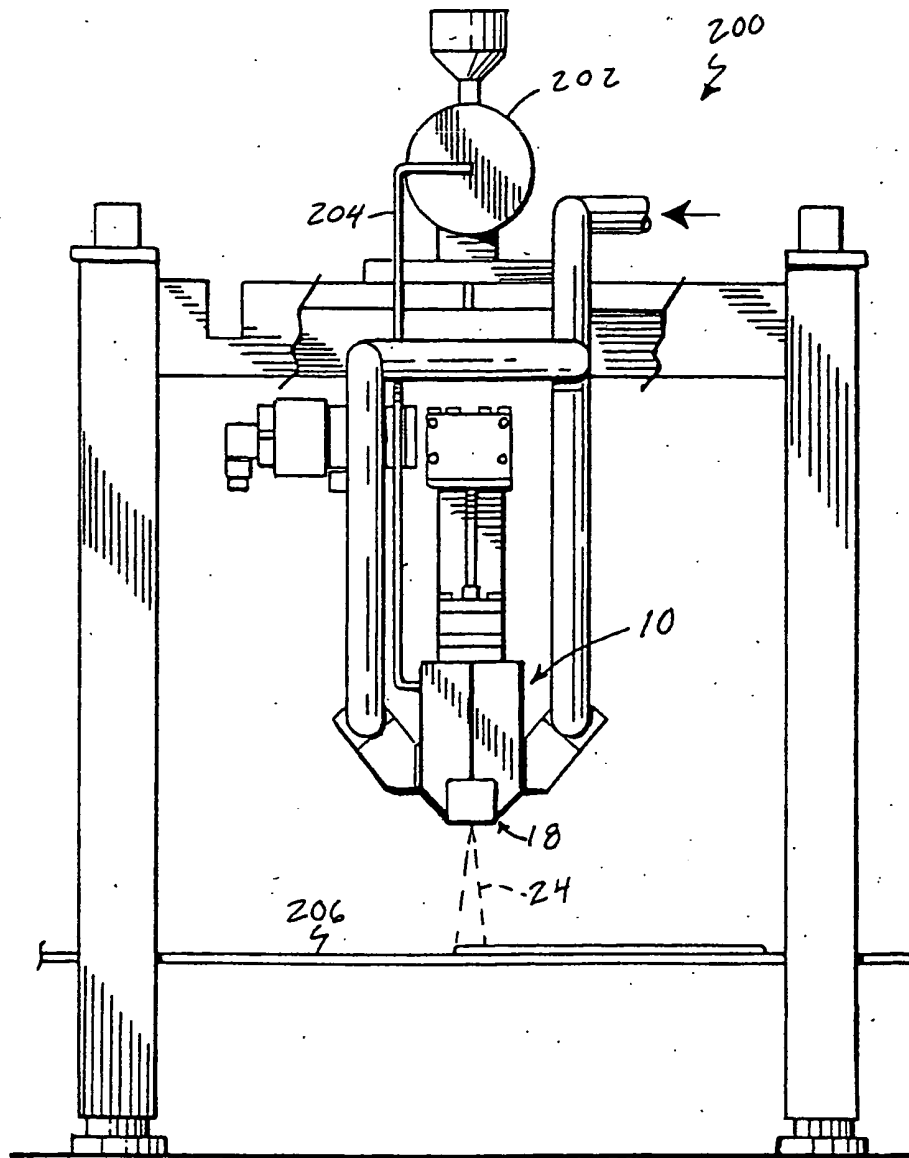


FIG. 6

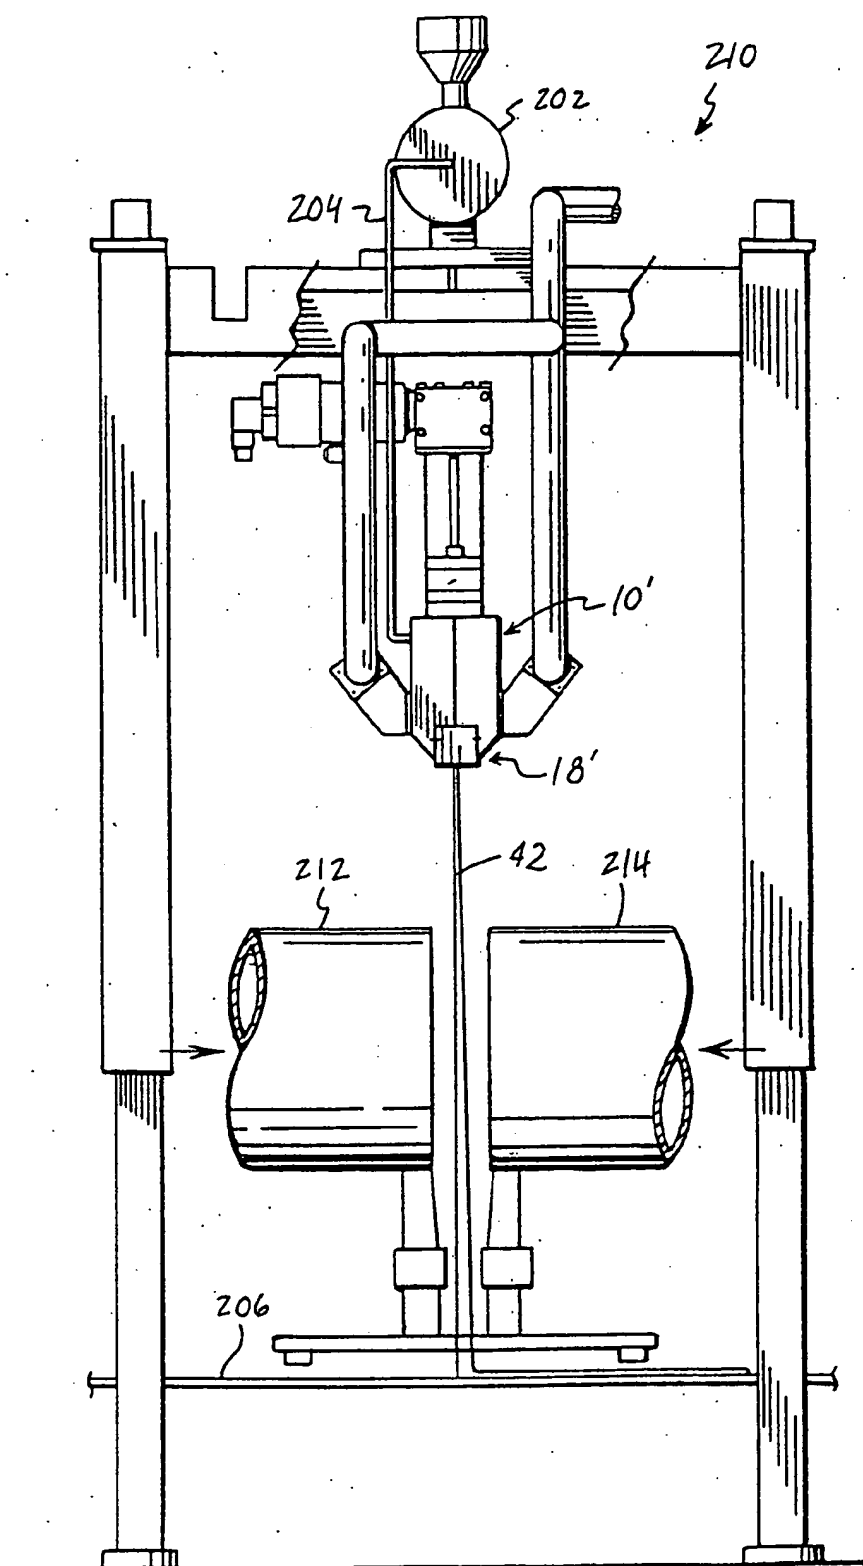


FIG. 7



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 00 4806

| DOCUMENTS CONSIDERED TO BE RELEVANT  |   |   |   |
|--|---|---|---|
| Category   | Citation of document with indication, where appropriate, of relevant passages                               | Relevant to claim                                       | CLASSIFICATION OF THE APPLICATION (Int.Cl.7)              |
| P,X  | WO 02 12601 A (E.I. DU PONT DE NEMOURS AND COMPANY) 14 February 2002 (2002-02-14)<br>* the whole document * | 1-9   | D01D5/30<br>D01D5/32<br>D01D5/34<br>D01D5/098<br>D01D4/02 |
| X  | EP 1 048 760 A (FREUDENBERG CARL FA)<br>2 November 2000 (2000-11-02)<br>* the whole document *              | 1-4,6,8,9   |   |
| X  | EP 0 088 744 A (MONSANTO CO)<br>14 September 1983 (1983-09-14)<br>* the whole document *                    | 1-4,6,8,9   |   |
| A  | EP 0 561 612 A (CHISSO CORP)<br>22 September 1993 (1993-09-22)<br>* the whole document *                    | 1-9   |   |
|  |   |   | TECHNICAL FIELDS SEARCHED (Int.Cl.7)                      |
|  |   |   | D01D  |
| The present search report has been drawn up for all claims   |   |   |   |
| Place of search<br><b>THE HAGUE</b>  |   | Date of completion of the search<br><b>17 June 2002</b> | Examiner<br><b>Tarrida Torrell, J</b>                     |
| CATEGORY OF CITED DOCUMENTS<br>X : particularly relevant if taken alone<br>Y : particularly relevant if combined with another document of the same category<br>A : technological background<br>O : non-written disclosure<br>P : intermediate document<br>T : theory or principle underlying the invention<br>E : earlier patent document, but published on, or after the filing date<br>D : document cited in the application<br>L : document cited for other reasons<br>& : member of the same patent family, corresponding document |   |   |   |

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 4806

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-06-2002

| Patent document<br>cited in search report |   | Publication<br>date |    | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----|----------------------------|---------------------|
| WO 0212601                                | A | 14-02-2002          | US | 2002034909 A1              | 21-03-2002          |
|   |   |                     | WO | 0212601 A1                 | 14-02-2002          |
| EP 1048760                                | A | 02-11-2000          | FR | 2790487 A1                 | 08-09-2000          |
|   |   |                     | BR | 0000719 A                  | 30-01-2001          |
|   |   |                     | CA | 2300583 A1                 | 02-09-2000          |
|   |   |                     | CN | 1265435 A                  | 06-09-2000          |
|   |   |                     | EP | 1048760 A1                 | 02-11-2000          |
|   |   |                     | JP | 2000248420 A               | 12-09-2000          |
| EP 0088744                                | A | 14-09-1983          | CA | 1203656 A1                 | 29-04-1986          |
|   |   |                     | EP | 0088744 A2                 | 14-09-1983          |
|   |   |                     | JP | 58169509 A                 | 06-10-1983          |
|   |   |                     | KR | 8601528 B1                 | 02-10-1986          |
|   |   |                     | US | 5093061 A                  | 03-03-1992          |
| EP 0561612                                | A | 22-09-1993          | JP | 3134959 B2                 | 13-02-2001          |
|   |   |                     | JP | 5263307 A                  | 12-10-1993          |
|   |   |                     | AU | 3529793 A                  | 23-09-1993          |
|   |   |                     | DE | 69312537 D1                | 04-09-1997          |
|   |   |                     | DE | 69312537 T2                | 02-01-1998          |
|   |   |                     | DK | 561612 T3                  | 29-09-1997          |
|   |   |                     | EP | 0561612 A2                 | 22-09-1993          |
|   |   |                     | KR | 247265 B1                  | 01-04-2000          |
|   |   |                     | US | 5511960 A                  | 30-04-1996          |

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**